



Aero Do It Yourself (DIY) Recycled Rubber Surfacing Keeps **Costs Down and Makes Installation Feasible for Everyone**



APPLICATIONS

- ✓ Under playground equipment
- Sandpits and water play areas
- ✓ Pathways, concrete or pergola areas
- Areas where grass will not grow
- Around pools

Indoors...

- Home gyms or workshops
- Verandahs and pathways



1.6m

1.8m

PRODUCT

Aero SuperSaver DIY rubber surfacing is the versatile answer when impact absorption and non-slip properties are needed. Aero DIY complies fully with Australian Standard AS/NZS 4422:1996 for playground safety surface requirements and caters for fall heights up to 1.1M or up to 3.6M when installed over A1 Rubber Shockpads.

Aero DIY tiles are manufactured under strict quality control to ISO 9001. The medium density compound of polymetically bound rubber crumb provides a soft, resilient, non-slip surface designed to maximise underfoot comfort and stability. As with other Aero surfacing systems, DIY tiles are prefabricated in the factory, to ensure density and thickness are maintained across all parts of the softfall surface. This is every customer's guarantee of consistent performance and makes installation a breeze!

DIY SuperSaver comes in 1^m square tiles and will quickly cover a large area. Tiles are sealed and bonded to each other along the reverse bevel edge using a flexible, tough, polyurethane construction adhesive.

Colour Selection

Size and Fall Height Rating

•	Blue	DIY Aero SuperSaver Kit Code Thickness			Size	over compacted	
•	Brick Red				•	crushe	
The state of		ASS15	15mm	ſ	1m ²	0.6	m
	Bright Green	ASS20	20mm	n	1m ²	0.7	m
	Grey	Fall heights greater than 0.7m require Aero Low Rebound Shockpads (ASPLR) under the surface tile					
•		ASPLR15/	ASS15	30mm	1:	m² 0.9)m
	Dark Green	ASPLR20/	ASS15	35mm	1:	m² 1.1	m
• • •		ASPLR25/	ASS15	40mm	1:	m² 1.2	2m
		ASPLR30/	ASS15	45mm	1:	m² 1.4	ŀm
		ASPLR35/	ASS15	50mm	1:	m² 1.5	5m



*Fall heights greater than 2.1m can be accommodated by a double layer of Shockpads below the surface tile

55mm

60mm

65mm

 $1m^2$

1m2

1m²

THE PLAYGROUND PEOPLE

ASPLR40/ASS15


ASPLR45/ASS15

ASPLR50/ASS15

Ph: (02) 6297 3700 Fax: (02) 6299 2192 www.playgroundpeople.com.au 57 Ridgeway Road, Queanbeyan NSW. PO Box 193, Queanbeyan NSW 2620 Email: info@playgroundpeople.com.au

Aero DIY tiles are the logical choice for rubber safety surfacing where cost must be kept to minimum and an installation warranty is not required. Aero is suitable for use indoors and outdoors.

Step 1. Base Preparation

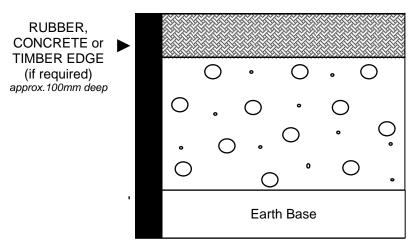

- Aero Rubber DIY Tile
- Stabilized base material e.g.
- Compacted road base (60mm)
- Compacted fine crushed rock (60mm)
- Concrete
- Flooring

Step 2. Installation

Partial direct gluing to a stable surface



Installation must be to a stable surface. This can be by complete or partial direct gluing to a suitable existing surface or involve the creation of a smoothed and stabilised compacted crusher dust base with minimum 2% crossfall.

Tiles should be kept clean and free of moisture during installation as this can detract from performance of the construction adhesive. All required adhesive is supplied. Applicator guns may be purchased separately.

Our comprehensive installation instructions will take you step by step through the process of preparing the base, laying the rubber, finishing the edges and taking care of the surface once installed. Should you need advice, simply call us and one of our expert staff will be happy to assist you.

Advantages of Aero DIY Rubber Tiles:

- precision factory manufactured
- finest quality polyurethane and recycled rubber tyre buffings
- computer controlled consistent density and resiliency

Versatility

Aero Super Savers are compatible with Aero Cool technology, enabling bright colours and designs to be added to the surface as budgets allow. The unique seam join system enables extensions and repairs to be carried out neatly without adversely affecting the integrity or appearance of the product.

Compliance

All Aero softfall products conform to Australian Standard AS/NZS 4422: 1996. Aero comes with independent laboratory test results showing compliance to the Standard at the fall height specified, including at the joins.

Warrantv

The manufacturer warrants the owner that the Aero rubber surface will be free from manufacturing defects for a period of 3 years from the date of purchase when used for the purpose the manufacturer intended and in accordance with care instructions. Warranty excludes misuse, abuse, vandalism or accidental damage.

Ordering

Please call us during business hours (8.30am-5.30pm Mon-Fri). We can discuss details of your proposed installation, help you determine your fall height requirements and provide expert advice on the type, style and quantity of materials needed. Alternatively, you can email us at info@playgroundpeople.com.au

THE PLAYGROUND PEOPLE

Ph: (02) 6297 3700 Fax: (02) 6299 2192 www.playgroundpeople.com.au 57 Ridgeway Road, Queanbeyan NSW. PO Box 193, Queanbeyan NSW 2620 Email: info@playgroundpeople.com.au